

STRINGALONG


A product of Cappuccio Enterprises

U.S. Patent 6,421,926

TRINGALONG

Making adjustments is easy. Simply loosen the Thumb Screw and move the collar up or down the Steel Grade Stake - with or without the string attached.

No more wasted time struggling with knots!

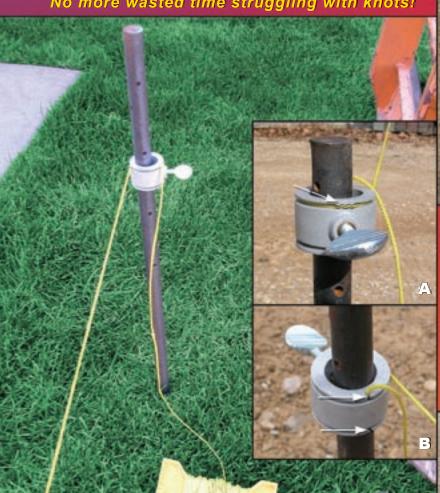

STRINGALONG can handle many string lines at a time.

- A. Gripping Teeth hold string lines securely.
- B. The Lock Notch for beginning and end of string line runs to insure no slippage of string.



One handed adjustment of STRINGALONG

Set once with a laser or transit and you are done!

Shipping Weight: Bag (12 units) - 2 lb (1 kg) Case (24 bags) - 48 lb (22 kg) Master Pack (4 cases) - 95 lb (43 kg)

PAVE TECH, INC.

PO Box 576 Prior Lake, Minnesota 55372 USA 800-728-3832 Phone 952-226-6400 Fax 952-226-6406 sales@paveedge.com



Great for stringline and setting grade! Comes predrilled for use with wood forms. Steel Stakes 3/4" x 24" with 16 D nail holes. Shipping Weight: 33 lb (15 kg)



Steel Stake Puller works on all lengths of round and flat steel stakes and fence posts. The Stake Puller's Shipping Weight: 15 lb (7 kg)

LaserSQUARE PRO



90 Vertical Dual Laser with Hard Case



Rugged, molded, padded, plastic case includes: 2 laser targets, 1 set laser-enhancing glasses, 1 cast aluminum *LASERSQUARE PRO*, 1 set C batteries. Place for extra set of C batteries.



When shooting longer lines for bond straightening, use supplied targets.

Shipping Weight: 3 lb (1.5 kg)





LASERLEVEL


Transit, Tripod , Rod, and Target for Jobsite Layout





Quick setup...Simple to use...Speeds elevation checking

All on one Hard Case design...Nothing left behind





All components nest perfectly into hard case. There is even a spot for an extra D battery.

Grooved Rod allows for easily adjusted friction fit Target. Target uses 9 Volt battery. Shoot Laser from both front and back of target. Visual and audible indicators.



Operates on 1D battery.

Simple operation: Self leveling Laser is permanenty attached to tripod. Laser head adjustment is easy with spring tensioner.

- 1. Set tripod feet into soil.
- Adjust laser head, so that bubble level is near center.
- 3. Push "on" button.
- Unit will self-level and show green light. You are good to go.



Aluminum 3 ft Rod sections snap and lock together.

Shipping Weight: 22 lb (10 kg)





Rugged, Lightweight, Patented Design Folds for Storage and Transport

World's Best Paver Retaining Wall and Masonry Layout Square





Perfect 45 and 90 Angles

Made in USA

Shipping Weight: 6 lb (3 kg) each

Distributed by:

