
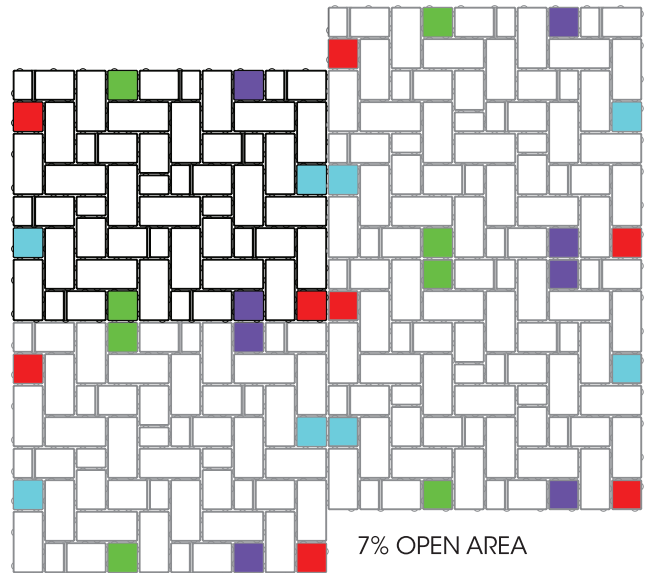

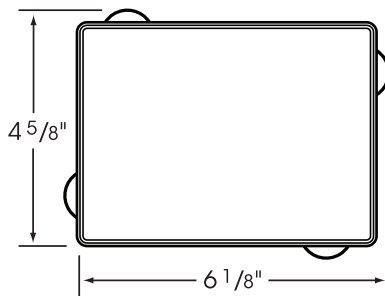

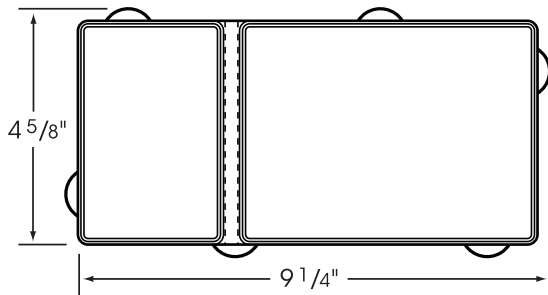


PERMEABLE PAVING UNIT

Permeable 4 1/2" x 9" Scored

for mechanical installation

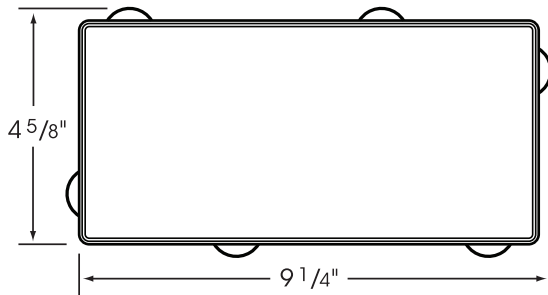

Highlighted areas show half size units that will be removed within the laying area and replaced with full size units. Half units can be used around the perimeter to replace full units that may need cut. Full units can be purchased separately by full strap or cube quantities.

PEDESTRIAN VS. VEHICULAR USAGE COMPARISON

	HANOVER® PRODUCT	PEDESTRIAN USE	LIGHT VEHICULAR USE	MODERATE VEHICULAR USE
		use by persons on foot and any mobility impaired persons using a wheelchair	pedestrian use & low speed, low volume residential and light commercial vehicular use	pedestrian use & low speed, moderate volume residential and moderate commercial vehicular use
		MINIMUM THICKNESS	MINIMUM THICKNESS	MINIMUM THICKNESS
PERMEABLE PAVING UNITS	Aqua-Loc®	3"	3"	3"
	EcoGrid®	4"	4"	NO MODERATE VEHICULAR USE
	Permeable 4" x 8"	3"	3"	3"
	Permeable 4 1/2" x 9"	3"	3"	3"
	Permeable 4 1/2" x 9" Scored	3"	3"	3"
	Permeable 3 1/4" x 18"	4"	NO LIGHT VEHICULAR USE	NO MODERATE VEHICULAR USE
	Permeable 12" x 18"	3"	NO LIGHT VEHICULAR USE	NO MODERATE VEHICULAR USE

Please Note: Sizes shown are nominal. Products are made to fit metric modules. Overall dimensions include one spacer.

HANOVER®
Architectural Products
 5000 Hanover Road, Hanover, PA 17331
 717.637.0500 fax 717.637.7145
 www.hanoverpavers.com